




COLOR EXPRESS GZH5306SG



SOLVENT SERIES

REALISTIC IMAGE

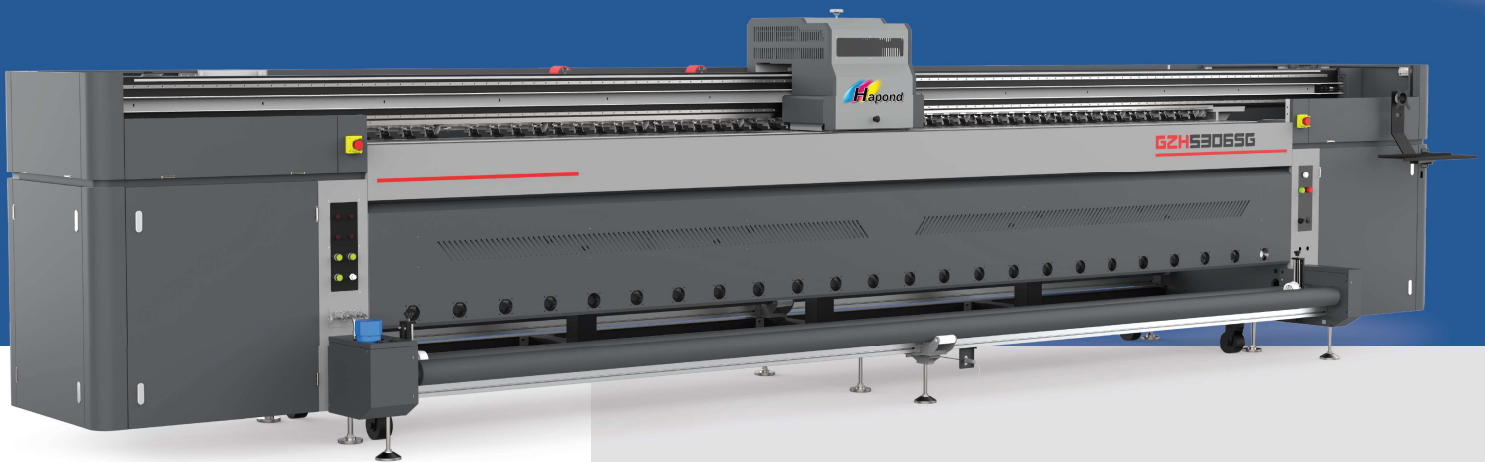

MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry

Packaging Industry

Exhibition Industry

Leather & Textile Industry

JAPAN
DIMATIX (Fujifilm)
Print Head



SOLVENT SERIES

◀ **COLOR EXPRESS GZH5306SG**

HAPOND DIGITAL TECHNOLOGY SDN. BHD. (788546-V)

COLOR EXPRESS GZH5306SG

▶ Professional Inkjet Printer

TECHNICAL SPECIFICATIONS

Dimension 机器尺寸	7550mm(L/长) x 1800mm(W/宽) x 1515mm(H/高)		
Weight 机器重量	3000kg / 公斤		
Max. Print Width 打印宽度	5300mm / 毫米		
Max. Media Width 材料宽度	5300mm / 毫米		
Ink Type 墨水类型	Solvent Based Pigment Ink / 溶剂颜料墨水		
Ink Color 墨水颜色			
Ink Supply System 供墨系统	Negative Pressure Recirculation System / 负压在循环系统		
Print Head 打印喷头	STARFIRE 1024 (25pl), Optional: STARFIRE 1024 (10pl)		
No. of Print Head 喷头数量	4 / 6 units		
Print Resolution 打印精度	300x400dpi, 300x600dpi, 300x800dpi, 600x400dpi, 600x600dpi, 600x800dpi		
Print Speed 印刷速度	Production Mode / 生产模式	173 m ² /h 	260 m ² /h 
	Quality Mode / 品质模式	116 m ² /h	173 m ² /h
	High Precision Mode / 高精度模式	87 m ² /h	130 m ² /h
Print Mode 打印模式	Uni and Bi-Direction / 单和双向		
Media Type 适用材料种类	Banner Flex, Canvas, Mesh Paper, Synthetic Paper, PVC, Reflective Film, Sticker, Tarpaulin, Textile, Vinyl, Wallcoverings, etc.		
RIP & Control Software 软件输出	Hapond Printer Manager, PhotoPrint, Optional: Onyx RIP		
Drying System 干燥系统	Pre, mid & extended heater + IR Dryer / 前置、中置和扩展加热器+红外线烘干机		
Media Handling 材料处理系统	Automatic media feeding and taking up system with pneumatic shaft 高精度送布系统选配收纸系统		
Image Format 打印文件格式	BMP, TIFF, JPEG, EPS, PDF, etc.		
Color Management 颜色控制	ICC Profile / ICC彩色特性文件		
Data Interface 数据传输	USB 2.0/3.0		
Input Voltage 输入电压	Three Phase, AC 380 ± 10% 27A, 50/60Hz / 三相, 380V交流 27A, 50/60赫兹		
Working Environment 工作环境	Temperature / 温度 : 20C° ~ 28C° Humidity / 湿度 : 40% ~ 70%		

Technical specifications are subject to change without prior notice.

